

# Textiles Overview Brochure

2026

**cramer**

1523 Grand Blvd. Kansas City, MO 64108  
Phone: 800-366-6700 | [www.cramerinc.com](http://www.cramerinc.com)

# Seating Textiles

## Thoughtfully selected for technical environments.

All Cramer textiles are carefully selected with healthcare, higher education, and lab environments in mind. This collection of textiles meets the same stringent standards we demand of our premier line of task chairs and stools by concentrating on smart design and high-performance.

A main focus, as always, is on infection control and durability. Shallow textures and minimalistic patterns are incorporated in order to provide a unique and modern variety of design options without compromising performance or cleanability.

The entire offering exceeds our 100,000 double rub requirement and the majority of our fabrics meet advanced environmental and sustainability standards.

<b>r+ / ESD</b>	<b>3</b>
<b>Grade 1</b>	<b>4</b>
<b>Grade 2</b>	<b>5</b>
<b>Grade 3</b>	<b>6</b>
<b>COM</b>	<b>8</b>

## Our textile partners

Textile partner programs showing a “Cramer Grade” can be used for budgetary pricing purposes. It does not guarantee textiles can be used to produce a specific Cramer seating model. Please contact the Cramer sales and support team at sales@cramerinc.com, or call 800.366.6700 to confirm your specific textile selection is already on our extensive list of pre-approved textiles. If a specific textile has not yet been preapproved, simply send us a memo sample notating the model you require it be applied to along with your contact information. We will contact you with approval or feedback after the memo is received.

### CF Stinson



- <http://www.cfstinson.com/>

### Mayer Fabrics



- <https://www.mayerfabrics.com/>

### Momentum Textiles



- <https://momentumtextilesandwalls.com/mfg/cramer>
- Sustainable Performance Coated Digital Card
- Coated Performance Digital Card

# r+™ Technology

Unmatched in comfort, durability and cleanability. Specifically designed for technical environments.

**Content:**

100% polyurethane  
PVC free

**Performance:**


Tear strength: 17.7kgF  
Stretch: 660%  
Abrasion Resistance: 25,000 cycles  
Puncture Resistance: 9.9kgF

**Finish:**

Non-slip

**Properties:**

- Seamless, chemical-resistant molded cover
- 1/8-in. thick textured polyurethane
- 3-in. thick premium molded foam
- Soil- and stain-resistant properties
- Puncture, tear, and abrasion resistant
- Cleanable with bleach, ethanol, or chemicals

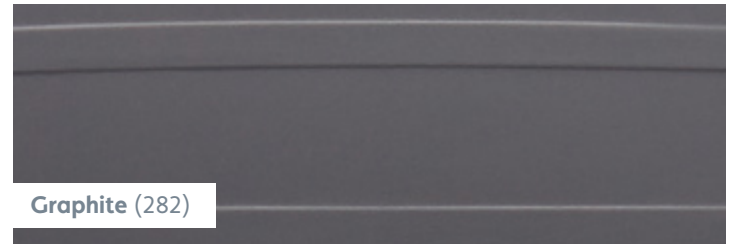

# Electrostatic Dissipative (ESD)

## ESD VINYL



**Content:** 100% Vinyl

**Backing:** 5.1 Spun Polyester knit

**Finish:** None

**Abrasion Resistance:** Passes 100,000 Double Rubs (Wyzenbeek)

**Cleaning Information:** (WS) Water/Solvent Cleaner. See detailed cleaning guidelines on page 8.

**Flammability:**

Passes NFPA 260/UFAC Class 1; Cal 117 Section E

**Properties:**

**Breaking Strength:** Warp 78/Fill 80

**Colorfastness to Crocking: Dry:** Class N/A/Wet: Class N/A

**Colorfastness to Light:** 60 hours

# Grade 1

## MAYER FORTE

**Content:** 100% Polyester

**Backing:** Acrylic

**Finish:** Stain Repellent

**Abrasion Resistance:**  
Passes 183,000 Double Rubs (Wyzenbeek) / Surface Abrasion: Heavy Duty ASTM D 4157 (Wyzenbeek/Cotton Duck)

**Cleaning Information:**  
(WS) Water/Solvent Cleaner. See detailed cleaning guidelines on page 8.

**Flammability:**  
California Technical Bulletin 117-2013, NFPA 260/UFAC Class 1, ASTM E84 (Adhered) Class 2 or B

**Properties:**     

**Reduced Environmental Impact:**  
GREENGUARD Gold Certified for low chemical and particle emissions to UL standard UL 2818



**Breaking Strength:**  
Warp 395/Fill 298

**Seam Strength:**  
Warp: 81/Fill: 70

**Pilling Resistance:**  
ASTM D 3511 Class 5

**Colorfastness to Crocking:**  
AATCC-8 Dry: Class 4 min / Wet: Class 4

**Colorfastness to Light:**  
AATCC 16 Class 5 at 40 hours

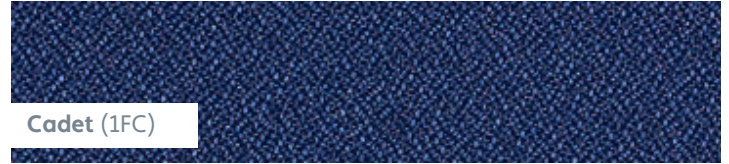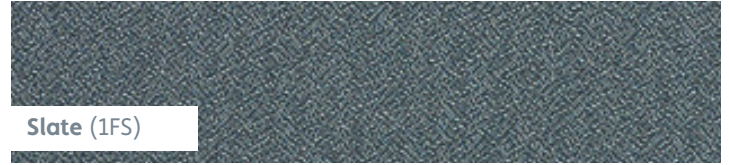

## MAYER RANCHERO

**Content:** 85% Vinyl Face

**Backing:** 15% polyester

**Finish:** None

**Abrasion Resistance:**  
Exceeds 250,000 Double Rubs (Wyzenbeek)

**Cleaning Information:**  
(W) Water-Based Cleaner, (BC) Bleach Cleanable  
1 part bleach to 9 parts water = 10% bleach to 90% water solution. See detailed cleaning guidelines on page 8.

**Flammability:**  
California Technical Bulletin 117-2013, NFPA 260/UFAC Class 1, AB 2998 Compliant, FMVSS 302

**Properties:**     



**Reduced Environmental Impact:**  
GREENGUARD Certified for low chemical and particle emissions to UL standard UL 2818, No FR/Antimicrobial/Antibacterial Additives

**Breaking Strength:**  
Warp 87/Fill 71

**Seam Strength:**  
Warp: 47/Fill: 32

**Colorfastness to Crocking:**  
Dry: Class 4 min/Wet: Class 4 min

**Colorfastness to Light:**  
Grade 5 at 200 hours

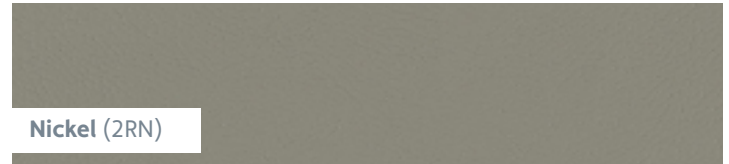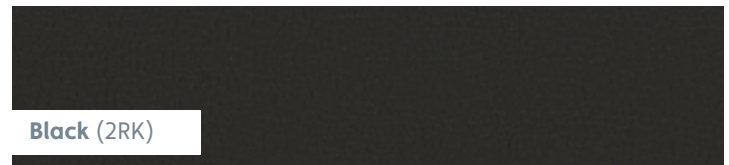

# Grade 2: Premium Textiles

## MOMENTUM ENDURANCE EPU

**Content:** 100% EPU  
Polyurethane

**Backing:** Polyester

**Durability:** 1,000,000 Double  
Rubs

**Cleaning Information:**  
(W) Water-Based Cleaner,  
(BC) Bleach Cleanable  
(4:1). See detailed cleaning  
guidelines on page 8.


**Flammability:**  
CA Bulletin 117 2013, UFAC  
Class 1, NFPA 260 Class 1,  
Passes IMO Part 8 With Proper  
Components

**Other:** ISO 1419 Method C 15  
Weeks, ASTM D3690 02 Grade A

**Properties:** 

**Reduced Environmental Impact:**  
GREENGUARD Certified, PVC Free


**Colorfastness:**  
A4 - AATCC 16 opt 3, CLASS 4

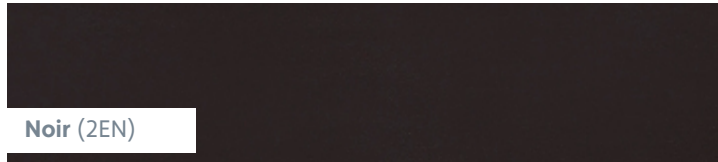

Noir (2EN)



Gravel (2EG)

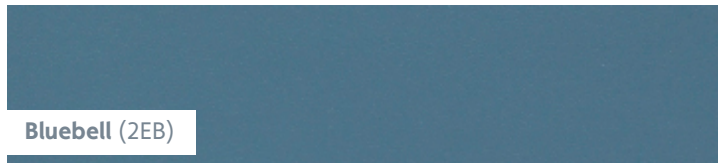

Bluebell (2EB)

## CF STINSON WEFT

**Content:** Non-Phthalate Vinyl  
Face

**Backing:** Polyester

**Finish:** Advanced Soil and  
Stain Resistant Topcoat + ink  
resistance

**Abrasion Resistance:**  
Exceeds 1,300,000 double  
rubs, CFFA-1

**Cleaning Information:**  
(W) Water-Based Cleaner,  
(BC) Bleach Cleanable  
1 part bleach to 9 parts  
water = 10% bleach to 90%  
water solution. See detailed  
cleaning guidelines on page  
8.

**Flammability:**  
BIFMA Class 1, California  
Technical Bulletin 117-2013  
Section 1 Passed, NFPA 260  
Class 1, UFAC Class 1

**Properties:** 

**Reduced Environmental Impact:**  
GREENGUARD Gold Certified,  
Formulated without phthalates,  
No PFAS, fluorocarbons or  
perfluorinated compounds, No  
added flame retardants, No  
added antimicrobials.

**Breaking Strength:** CFFA-17  
Warp: 85 lbs. min., Fill: 75 lbs.  
min.

**Seam Strength:** CFFA-14 Warp:  
35 lbs. min., Fill: 30 lbs. min.

**Colorfastness to Light:** CFFA-2  
650 Hours, Class 4.0



Breeze (2WB)



Dusk (2WD)



Silver (2WS)

# Grade 3: Silicone Textile

## MAYER APOLLO SILICONE

**Content:**

45% SiO™ Silicone face

**Backing:** 55% Polyester

**Finish:** None

**Abrasion Resistance:**

Passes 225,000 Double Rubs (Wyzenbeek/Cotton Duck), Surface Abrasion: Heavy Duty ASTM D4157

**Cleaning Information:**

(W) Water-Based Cleaner, (IA) Isopropyl Alcohol, (BC) Bleach Cleanable 1 parts bleach to 4 parts water = 20% bleach to 80% water solution. See detailed cleaning guidelines on page 8.

**Flammability:**

California Technical Bulletin 117-2013, NFPA

260/UFAC Class 1, AB 2998 Compliant, ASTM E84 (Adhered or Unadhered) Class 2 or B, FMVSS 302; IMO FTP 2010 Code MSC.307(88), Part 8, 3.1 & 3.2, BS 5852: 2006 Crib 5

**Properties:**     

**Reduced Environmental Impact:**


GREENGUARD Certified for low chemical and particle emissions to UL standard UL 2818, PVC Free, Phthalate Free, Lead Free, BPA Free/TRIS Free/Formaldehyde Free, Solvent Free, Does not contain conflict minerals, Free of FR additives, Free of Anti-Microbial & Anti-Bacterial chemicals.

**Breaking Strength:**

Warp 250/Fill 250

**Seam Strength:**


Warp: 102/Fill: 102

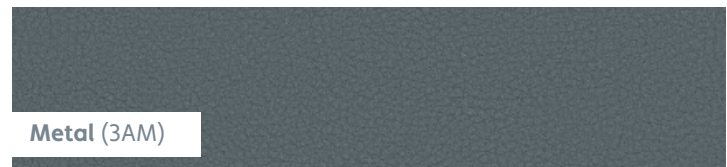

Metal (3AM)



Indigo (3AI)

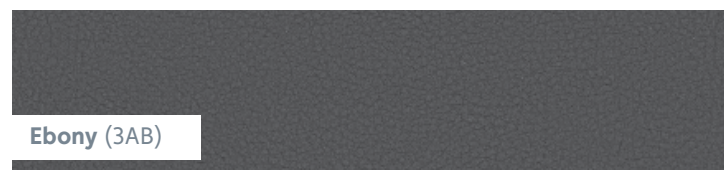

Ebony (3AB)

**Colorfastness to Crocking:**

AATCC 8 Dry: Grade 4 min / Wet: Grade 4 min

**Colorfastness to Light:**

AATCC 16 (Option 3) 500 hours, ASTM G 154-16 1300 hours

## MOMENTUM SILICA

**Content:** 100% Silicone

**Backing:** Polyester

**Durability:**

365,000 Double Rubs

**Cleaning Information/**

**Maintenance:**

(WS) Water-Based Cleaning Agents or Foam, (BC) Bleach Cleanable (4:1). See detailed cleaning guidelines on page 8.

**Flame Resistance:**

CA Bulletin 117 2013, UFAC Class 1, NFPA 260 Class 1, BS5852-2006 Crib Ignition

Source 5, IM     


**Properties:**

**Reduced Environmental**


**Impact:** GREENGUARD Certified, PVC Free

**Color Fastness:**

AA4.5 - AATCC 16 - 1990 CLASS 4.5

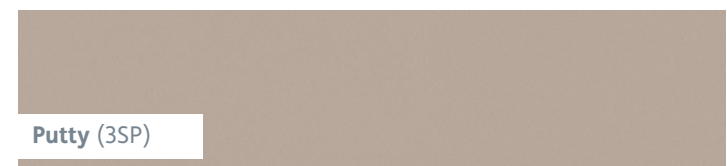

Putty (3SP)

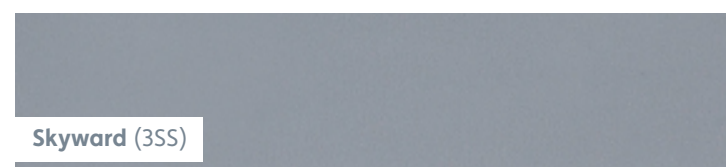


Skyward (3SS)



Nero (3SN)

## CUSTOMER'S OWN MATERIAL (COM)

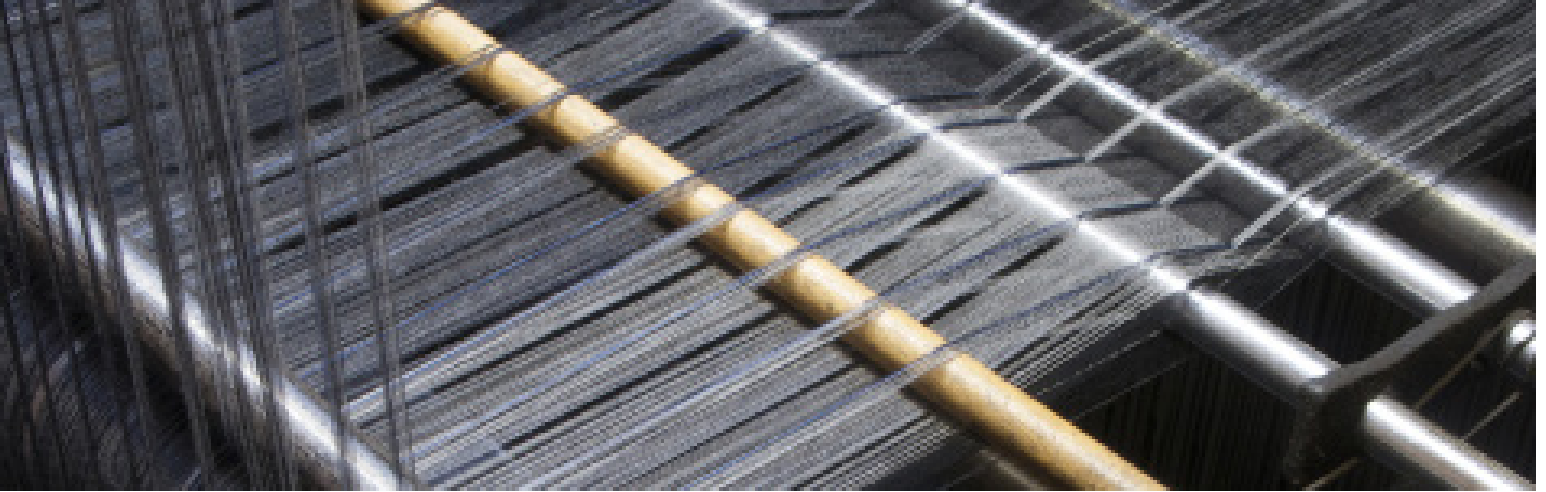

If you would like to use a COM fabric or vinyl, please call Cramer Customer Care at **800.366.6700** to see if your selection is already on our extensive list of approved textiles. If the COM has not yet been approved, simply send us a memo sample and note the product to which the COM will be applied along with your contact information. We will contact you with approval after the memo is received.

When you are ready to place your order, submit your COM to us at:

**Cramer LLC**  
**Attn: COM Dept**  
**895 East 40th Street**  
**Holland, MI 49423**

On your PO, use "COM" as the fabric code (ex. FSMD4-COM-1) and note the COM vendor, pattern name, and color in the item description. Lead time on COM orders begins once COM is received. If you require a specific ship date, also note the date your COM will ship from the vendor.

Our COM yardage requirements (based on 54" wide fabric) are 1.25 yards for all products (Triton Max 1.5 yards). If you are ordering a large quantity of chairs or have a COM with a large repeat, we can provide a specific yardage quote for your needs. Excess yardage will be disposed of after order production. We assume no responsibility for the durability or tailoring quality of any COM.

## CLEANING GUIDELINES AND DETAILED CLEANING INSTRUCTIONS

### **(WS): Water/Solvent Cleaner**

Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry-cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

### **(W): Water-Based Cleaner**

Spot clean with water-based foam or water-based cleaners only. Do not use solvents. Remove ordinary dirt and smudges with a mild soap and water solution using a soft cloth or towel. Always rinse promptly with clean water and wipe dry. Pretest small area before proceeding.

### **(IA): Isopropyl Alcohol**

More stubborn stains may be eliminated using a cotton cloth

soaked in 70-91% isopropyl (rubbing) alcohol. Wipe without spreading stain to surrounding area. Rinse with fresh water and wipe dry.

### **(BC): Bleach Cleanable**

- 10% Solution - 1 part bleach, 9 parts water = 10% bleach, 90% water solution. Bleach solutions of up to 10% may be used for more difficult stains. Always rinse promptly with clean water after applying the bleach solution.
- 4:1 - 1 parts bleach to 4 parts water or 20% bleach to 80% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 20% bleach solution. Always rinse promptly with clean water after applying the bleach solution.
- 20% Solution - 1 parts bleach to 4 parts water or 20% bleach to 80% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 20% bleach solution. Always rinse promptly with clean water after applying the bleach solution.

# cramer

---

1523 Grand Blvd. Kansas City, MO 64108

Phone: 800-366-6700 | [www.cramerinc.com](http://www.cramerinc.com)